



Virtualizing SAP

An in-depth look on how The City of San Diego utilizes VMware ESX

Breakout Session # EA1562

Rick Scherer, VCP

Virtual Infrastructure Architect, San Diego Data Processing Corp.

September 17, 2008

Disclaimer

This session may contain product features that are currently under development.

This session/overview of the new technology represents no commitment from VMware to deliver these features in any generally available product.

Features are subject to change, and must not be included in contracts, purchase orders, or sales agreements of any kind.

Technical feasibility and market demand will affect final delivery.

Pricing and packaging for any new technologies or features discussed or presented have not been determined.

“These features are representative of feature areas under development. Feature commitments are subject to change, and must not be included in contracts, purchase orders, or sales agreements of any kind. Technical feasibility and market demand will affect final delivery.”

Housekeeping

- Please turn off your mobile phones, blackberries and laptops
- Your feedback is valued: please fill in the session evaluation form (specific to that session) & hand it to the room monitor / the materials pickup area at registration
- Please leave the room between sessions, even if your next session is in the same room as you will need to be rescanned

Agenda

- **About your Speaker, San Diego and SDDPC**
- **The City of San Diego and SAP**
 - Their Business Needs and How Could We Accomplish Them
- **Why VMware VI3**
 - Why The City of San Diego & SDDPC choose VMware
- **SAP on VMware – Best Practices**
- **Why NetApp NFS Datastores**
 - Fast Restores, Automated D.R. and Data De-Duplication
- **Some Good Resources**
 - Forums, Knowledge Bases, VMTN, Google
- **QA**

About the Speaker

Has been working in IT for 11 years

Systems Administrator for 9 years

- UNIX Administration (Solaris, AIX, Linux)
- Windows Administration (Windows NT 4.0 +)
- Network Design and Admin. (Cisco Catalyst and Cisco MDS)
- Programming (Perl, Shell, HTML)

Working with State/Local Government for 7 years

Working with VMware products for 5 years

- Workstation 4.0, VMware GSX, ESX 2.0

VMware VCP for 2 years (VCDX coming soon?)

About The City of San Diego

Americas Finest City

- 1.25 Million Residents
- The Best Climate in the United States

Over 10,000 Employees

- 8,500+ Windows XP Desktops (HP)
- 1,000+ Printers

Different Departments, Different Needs

- Water Department
- Environmental Services (Trash Pickup, etc.)
- Public Safety (Police, Fire, Lifeguard, etc.)
- City Administration (City Council, City Attorney, Mayor, etc.)

About San Diego Data Processing Corporation

Founded in 1979 by The City of San Diego

- Wholly Owned and Operated as a Non-Profit Company

250+ Employees

- Fully Independent Company
- Server/Application/Database Administrators, etc.
- Programmers, Project Managers, Executive Management, etc.

7,000 sq. ft. Data Center Facility

- 450+ Windows Servers (HP)
- 100+ UNIX Servers (Sun Microsystems)
- 275+ TB of Storage (NetApp 6040, 6030, 960; Sun StorageTek; HP EVA)
- 22 VMware ESX 3.5 Hosts – VC 2.5 – Mix NFS/FC Storage



The City of San Diego and SAP



The City of San Diego and SAP

What does The City of San Diego need?

- **Simplicity**
- **Consolidation**

The City of San Diego chose SAP NetWeaver ECC 6.0 as its choice ERP system. SDDPC provides technical consulting and resources to the implementation project team, as well as hosting the SAP computing infrastructure.

The City of San Diego and SAP

Business Continuance Requirements

- Systems Must Be Fully Redundant
 - Maximum 4 Hour Full Recovery
 - Maximum 30 Minutes Data Loss
- Systems Must Be Impervious To Local Disaster
 - Datacenter Failure
 - Storage Failure
 - Hardware Failure
 - SDDPC Maintains a second regional datacenter within the City
- Systems will be part of Enterprise Disaster Recovery Plan
 - SDDPC maintains a contract with a third-party provider for an out of state Disaster Recovery location

The City of San Diego and SAP


Going to SAP isn't going to simplify everything...

- 10+ SAP NetWeaver Modules
 - Multiple Servers = No Consolidation
 - We've Consolidated into one ERP System, but we still need to manage 14+ servers per environment (DEV, QA, PROD = 42+ servers)
- The City had chosen Microsoft Windows and SQL as the Operating System and Database for their SAP deployment
- Backup and Recovery are often more complex than initial deployment
- Development Availability must meet the Production systems, developers need fast recovery in case of error
 - Downtime for developers can become extremely costly

The City of San Diego and SAP

Why Don't We Virtualize?!

WE DID!



Virtually anything
is possible.

Why VMware VI3

Why the City of San Diego chose VMware

vmworld® 2008

Why VMware VI3

VMware Virtual Infrastructure Basics

- Server Consolidation
- Business Continuance
 - VMotion
 - Dynamic Resource Scheduling (DRS)
 - High Availability (HA)
- Disaster Recovery
 - Site Recovery Manager (SRM)
- Consolidated Backups
 - VMware Consolidated Backup (VCB)
- Power Management
 - Distributed Power Management (DPM)

Why VMware VI3

Our Existing VMware Farm

- (14) ESX 3.5 Hosts on HP and Sun Hardware
- (190+) Virtual Machines
 - Mostly Windows 2003, Some Linux and Solaris x86
- Disaster Recovery already in place
- Proven and Trusted

SAP Wasn't Supported

- At the time of our Blueprint SAP did not support VMware (officially)
- We decided to fully Virtualize development regardless of support
- Now that it is supported, we will plan on Virtualizing production after our initial deployment is complete.

Why VMware VI3

Virtualized SAP Development

- Four HP DL580 G5 Servers
 - (4) Quad Core Intel Xeon E7340 Processors 2.4GHz
 - 64GB RAM
 - (10) Gigabit Ethernet Ports
- NetApp 6030c Cluster
 - 10G Private VLAN For Storage Traffic
 - RAID6-DP with two separate Aggregates for O/S and Data
 - SnapManager for VI + SnapMirror + FlexClones
- Full Redundancy
- Fast Recovery

Why VMware VI3

Virtualized SAP Development

- SAP Netweaver
 - BI
 - ECC
 - E-Recruitment
 - GRC
 - Learning Solution
 - NWDI
 - PI
 - Portal
 - SAP Search
- Informatica
 - Data Migration

Virtual Machines typically consist with two vCPUs and 8-16GB RAM.

O/S VMDK are located on one NetApp aggregate and Data VMDKs are located on a separate NetApp aggregate.

Why VMware VI3

Virtualized Production Standby Environment

- Two HP DL580 G5 Servers
 - (4) Quad Core Intel Xeon E7340 Processors 2.4GHz
 - 64GB RAM
 - (6) Gigabit Ethernet Ports
 - 4GB Dual Port Fibre Channel
- NetApp 6040c Cluster
 - 10G Private VLAN For Storage Traffic
 - RAID6-DP with two separate Aggregates for O/S and Data
 - SnapManager for VI + SnapMirror + FlexClones

Physical Production Servers are P2V'd to Standby Environment

- SAP Data Drives (NetApp LUNs) Are SnapMirror'd and Presented to VM Guests as RDM

Why VMware VI3 / SAP on VMware - Benchmarks


Hardware Vendor	IBM	HP	Fujitsu Siemens Computers
Number of SD Users	545	516	490
Average Dialog Response Time (sec.)	1.98	1.92	1.93
SAPS	2730	2600	2470

All machines we're running VMware ESX 3.5 and VM Guests had 2 vCPUs running Windows 2003 Enterprise Edition.

Why VMware VI3 / SAP on VMware – Benchmarks

Benchmark 2008007

- HP Proliant DL580 G5
 - (2) Quad-Core Intel Xeon X7350 @ 2.93GHz
 - 64GB RAM
- Benchmark Users = 516 SD (Sales & Distribution)
 - Average Dialog Response = 1.92 seconds
 - Fully Processed Order Line items/hour = 52,000
 - Dialog Steps/Hour = 156,000
 - Average DB Request Time (dia/upd) = 0.016 sec / 0.012 sec
- CPU Utilization of ESX Host = 13%
- CPU Utilization of VM = 99%
- O/S = Windows 2003 Enterprise on VMware ESX 3.5
- Guest had 2 vCPUs
- SQL 2005
- SAP ECC 6.0



Virtually anything
is possible.

SAP on VMware Best Practices

vmworld 2008

SAP on VMware – Best Practices

Plan just like you would for physical

- Look at your SAPS (SAP Application Performance Standard)

Don't over commit memory

- SAP allocates memory permanently
- Use Memory Reservations to guarantee the full amount needed
- If using SQL server use "Fixed Memory Allocation"
- Multiple datastores for Virtual Disks
- Separate OS VMDK from DB/LOG VMDK
 - Put OS on slow physical disks (SATA)
 - DB on fast physical disks (SAS/FC)

Two is Better than One

- Two VMs with (2) vCPUs is more efficient than One VM with (4) vCPUs

SAP on VMware – Best Practices

VMware Tools

- SQL and SAP are big on time
- Make sure NTP is configured on your servers
- Enable time syncing in VMware Tools
- For **CPU-bound** systems with sufficient memory resources, use the SAP flat memory model with memory protection (mprotect) switched off. For more details on this configuration, see **SAP note 1002587**. This configuration yields the best performance and response times.
- For **memory bound** systems, use the classical SAP view memory model. To improve performance for this configuration, implement **Microsoft hotfix 931308** (see <http://support.microsoft.com/kb/931308>)

SAP on VMware – Best Practices

Get State of the Art

- Multi-Core CPU Architecture (Intel Dunnington 6-core)
- Hardware Assisted Virtualization (Intel VT & AMD-V)
- More Memory...More Memory...More Memory

Don't Forget About I/O

- Capture data should be on faster physical disks (FC/SAS)
- Retention Data can stay on your slower physical disks (SATA)

Verify your Service Console Settings

- Allocate Appropriate RAM to the Service Console – 800mb!
- Enable NTP and make sure its in sync
- Make sure DNS is functioning (forward and reverse lookups)

SAP on VMware – Best Practices

Network

- Conf
- Use
 - IE
 - Se
- Utiliz
- Si
- M
- 10Gb
- Cisco (
- esxc
- **ALWA**

The screenshot displays the VMware vSphere Network Configuration interface. It shows two virtual switches (vSwitch1 and vSwitch2) connected to physical adapters. A Cisco Discovery Protocol (CDP) properties window is overlaid on the right, showing details for a Cisco WS-C6506-E switch.

Cisco Discovery Protocol	
Properties	
Version	0
Timeout	0
Time to live	121
Samples	11180
Device Id	R1-RCDC-ERP1.sannet.gov
Address	10.9.0.19
Port Id	GigabitEthernet1/25
Software Version	Cisco IOS Software,
Hardware Platform	cisco WS-C6506-E
IP Prefix	0.0.0.0
IP Prefix Length	0
VLAN	699
Full Duplex	true
MTU	0
System Name	
System OID	
Management Address	10.9.0.19
Location	
CDP Device Capability	
Router	true
Transparent Bridge	false
Source Route Bridge	false
Network Switch	true
Host	false
IGMP Enabled	true
Repeater	false

SAP on VMware – Best Practices

Example of our vSwitch Configuration

The screenshot displays three overlapping configuration windows from VMware vSphere:

- Storage0 Properties:** Shows the 'NIC Teaming' tab with various settings like 'Load Balancing' and 'Network Failover Detection' checked. A blue callout box says 'If using Cisco switches...'. Below, under 'Active Adapters', it shows 'Virtual Switch: vSwitch1' and 'Storage0' connected to '9 virtual machine(s) | VLAN ID 900'.
- VMkernel Properties:** Shows the 'General' tab with 'Port Properties' set to 'VMkernel' and 'VLAN ID (Optional):' set to '900'. The 'VMotion' checkbox is unchecked. 'IP Settings' are configured with IP Address: 192.168.1.163 and Subnet Mask: 255.255.255.0.
- IP Address List:** A window showing a list of IP addresses with a 'Move Down' button. A blue callout box says 'ensure to enable'.

Another Tip.... If using VLAN tagging, ESX will always expect a VLAN ID, even if it is VLAN 1. The issue is that Cisco switches do NOT broadcast VLAN ID 1 because it is the native. You will need to specify an alternative native VLAN. You can do this in the port-channel and member ports;

'switchport trunk native vlan #####'

Virtually anything
is possible.

Why NetApp NFS Datastores

vmworld 2008

The Reasons We Chose NetApp NFS Datastores

Thin Provisioning

- Grow and Shrink your Datastore on the fly
- Only use the storage your consuming
 - Thin Provisioning Volume and VMDK (automatic for NFS datastores)

MSCS requires Thick VMDKs, VMDKs created on NFS datastores are Thin by default. Use vmkfstools to create your Thick VMDK.

```
vmkfstools -c [size] -d thick [full path to vmdk]
```

```
(ex: vmkfstools -c 20G -d thick /vmfs/volumes/nfsdatastore/vmtest/vmtest.vmdk)
```

Better Performance

- Bandwidth matters little, IOPs and Response Time matter a lot
- Single Mount across multiple hosts (outside VMware ESX as well!)
- NetApp Filer supports IEEE 802.3ad Link Aggregation

The Reasons We Chose NetApp NFS Datastores


Create a flexclone of your NFS Datastore snapshot;
'vol clone create <vol-name> -b <orig-vol-name> <snap-name>'
(ex: vol clone create

- I can flexclone a volume snapshot
- Mount the VMDK for file level restore
Use snaprestore to restore the volume
- Also can use snaprestore to restore

Use snap restore to copy VMDK files to
'snap restore -t file -s <snap-name>:
(ex: snap restore -t file -s vmsnap.1 -
/vmfs/volumes/nfs1/vm1/vmold.vmdk)

Automated DR

- Site Recovery Manager w/ NetApp
- Works with SnapMirror for full recovery
- Scheduled Automated DR tests

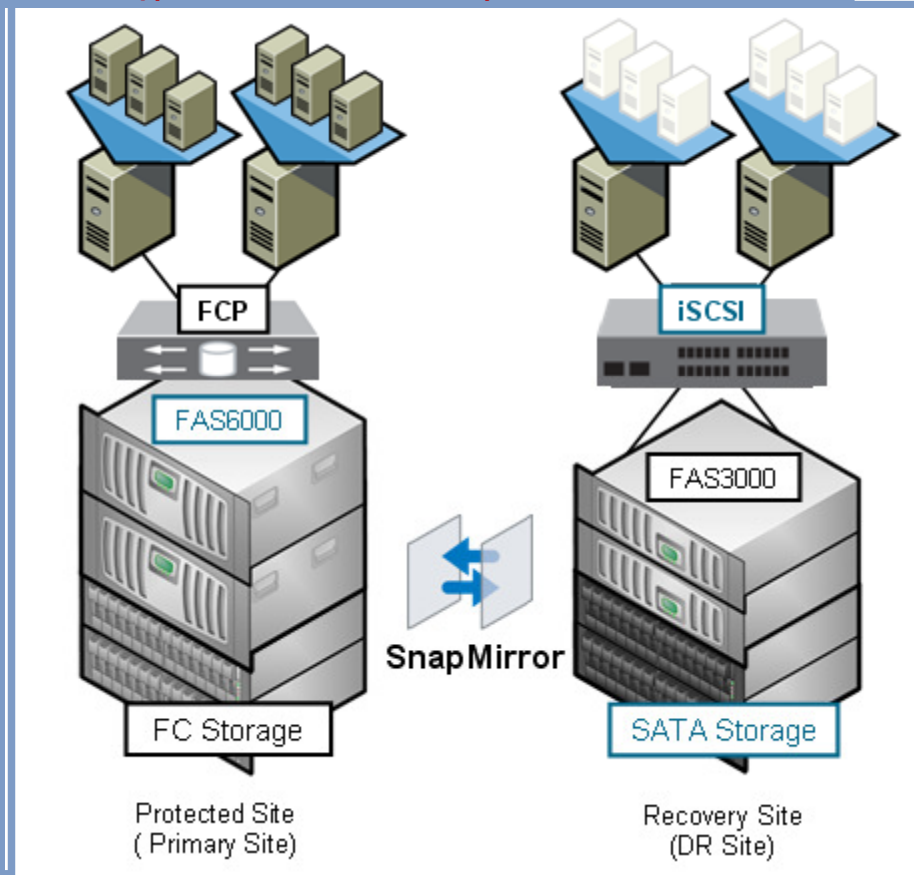

The Reason We Chose NetApp NFS Datastores

Data De-Duplication (NetApp A-SIS)

- No additional cost
- Only supported on NetApp XXXX Series Filers (ie: 2050, 3100, 6030)
- Little to no performance degradation
 - None on data writes
 - Roughly 2-5% on reads based on data type
- Virtualization is the perfect candidate for Data De-Duplication!
- Achieve 50-60% Storage Savings!

- A-SIS TIP :: Enable A-SIS on the volume prior to loading data on it.
 - (sis start -s /vol/path)
- Also, be cautious if you have a lot of snapshots on your volume. A-SIS creates a small amount of metadata.

NFS Datastores and VMware – Hints and Tricks

Separate your Storage Network

- Dedicated Ethernet for Storage and/or Private VLANs

Increase your NFS Datastore Limits

- By default VMware ESX allows 8 NFS Datastores, this limit can be increased to 32

If using a NetApp Filer, disable access time updates

- vol options <vol-name> no_atime_update on

NIC Teaming Failback

- Disable this, if your experiencing port failures you do not want your VMKernel jumping back and forth between vmnic's


NetApp Best Practice Guide

snap restore for deploying many VM's at once is handy since you can script the entire process

```
'snap restore -t file -s <snap-name> -r <new-vmdk-path> <orig-vmdk-path>'  
(ex: snap restore -t file -s vmsnap.1 -r /vmfs/volumes/nfs1/vm1/vmnew.vmdk  
/vmfs/volumes/nfs1/vm1/vmold.vmdk)
```

NFS Datastores and VMware – Hints and Tricks

- I/O Intense Virtual Machines will benefit when their Starting Partition is divisible by 4096.
- Misalignment can result in degraded performance. The recommended starting value is 32768, typical VMs default setting is 32256.
- The best option is to fix your template:
 - Prior to O/S installation boot with a WinPE CD
 - Run diskpart
 - Select Disk 0
 - Create Partition Primary Align=32
 - Reboot and Install your O/S as normal



References and Resources

Some Good Resources

http://www.vmware.com/files/pdf/whitepaper_sap_usecases_Q207.pdf

- VMware Infrastructure for SAP Enterprise Applications: Use Cases

<http://communities.vmware.com/blogs/SAPsolutions>

- Virtualization for SAP Solutions Blog

<http://www.sap.com/benchmark>

- SAP Benchmarking (including Virtualization Benchmarking)

http://vmware.com/files/pdf/whitepaper_SAP_bestpractice_jan08.pdf


- Best Practice Guidelines for SAP Solutions on VMware Infrastructure

<http://www.vmware.com/vmtn> - VMware Community Forums

<http://www.rtfm-ed.co.uk> – Helpful Blog Site

<http://blog.scottlowe.org> – Another Helpful Blog Site

<http://www.vmwaretips.com> – Tips & Tricks Blog Site (Just released for VMworld)



Virtually anything
is possible.

Q&A

Breakout Session # EA1562

Rick Scherer, VCP

Virtual Infrastructure Architect, San Diego Data Processing Corp.

September 17, 2008
